

## Horizontal Fiber Optic Splice Closure

### CH006F

#### Description:

CH006F is suitable for outdoors cable direct succeeded and optical shunt connection protection. The box body is made of high quality ABS material, internal turning plate of wiring is metal material, rubber ring sealing between the box body can be repeated.

The waterproof head PG21 which is on the left of box body has 12 round holes  $\Phi$  2.2 mm can output the FTTH cable to the client, another two waterproof heads PG21 which are on the right of box body can be in and out of the  $\Phi$ 12mm outdoor fiber optic cable. Its protection grade is IP66, product standard configuration is for wall installation accessories, overhead and or derrick installation hanging fixture are optional.



#### Features:

Can install 1pc 1x16 PLC, install 2 splice trays, each 12 fibers

Turning plate is integrated for metal material integrated wiring and line management, can install adapter SC, LC,...

Environmental temperature: -40°C to + 85°C

Atmospheric pressure: 70-106 Kpa

Intensity: 15 KV(DC) not being broken down, has no flying arc.


Components: Sealing tape, Insulation tape, Nylon tie, optical cable heat shrinkable sleeve, metal hook, seal fittings, numeral bar, retaining ring

#### Accessories package:

serial	material	Specificatio ns	qty
1	Conical sealing plug	$\Phi$ 8	1
2	Conical sealing plug	$\Phi$ 10	1
3	Conical sealing plug	$\Phi$ 12	1
4	Fiber protect sleeve	60mm	24
5	Insulating tape		1
6	Nylon tie	3*120mm	5
7	Allen wrench	S4	1
8	Winding pipe	$\Phi$ 6*1M	1
9	Magic tape	L=85mm	6
10	Wallmount fixed part		3



**Drawings: (mm)**

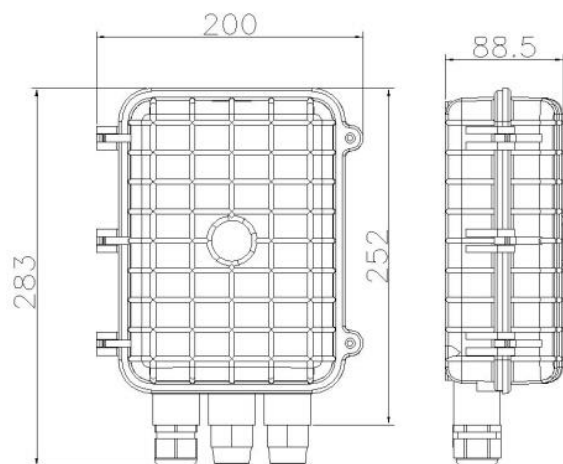

**Turning adapter plate type:**

12*SC/SX adapters	12*SC/DX adapters
12*LC/SX adapters	18*SC/SX adapters
Note: Adapters, PLC and pigtails are optional	

**Package:**

Size	GW	CTN
45*32*54cm	14.5KG	10PCS/CTN